



Φ3.6x10mm IEC STANDARD FUSE
 RoHS Compliant & Pb-Free
CERAMIC TUBE MICROFUSE (TIME-LAG)
 瓷保险丝管 (慢断型)

BREAKING CAPACITY / 分断能力:
 63A at 125V/250V AC


TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	Max. VOLTAGE DROP (mv) 最大电压降	SAFETY APPROVALS 安全认证			REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值
			CQC	cURus	TUV	
3CT 010H/L	1A	140	○	●	●	2.476
3CT 013H/L	1.25A	130	○	●	●	4.300
3CT 016H/L	1.6A	120	○	●	●	7.693
3CT 020H/L	2A	100	○	●	●	12.48
3CT 025H/L	2.5A	100	○	●	●	20.55
3CT 032H/L	3.15A	100	○	●	●	36.95
3CT 040H/L	4A	100	○	●	●	49.92
3CT 050H/L	5A	100	○	●	●	75.56
3CT 063H/L	6.3A	100	○	●	●	120.0
3CT 080H/L	8A	100	○	●	●	204.1
3CT 100H/L	10A	100	○	●	●	334.4

- DENOTES FOR APPROVED ● 表示已取得安全认证
- DENOTES FOR PENDING ○ 表示正在申请安全认证
- H DENOTES FOR 250V H 代表 250V
- L DENOTES FOR 125V L 代表 125V

Dimensions/ 尺寸:

Unit 单位: mm

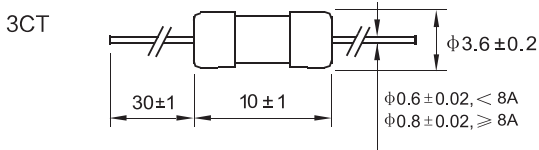


ELECTRICAL CHARACTERISTICS/ 电气特性:

RATING 额定	BLOWING TIME 熔断时间
2.1In	Max. 最慢 30 minutes
2.75In	Min. 最快 400 ms
	Max. 最慢 10 seconds
4In	Min. 最快 150 ms
	Max. 最慢 3 seconds
10In	Min. 最快 20 ms
	Max. 最慢 150 ms

3CT AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

3CT 平均 I-T 曲线图 (仅供参考)

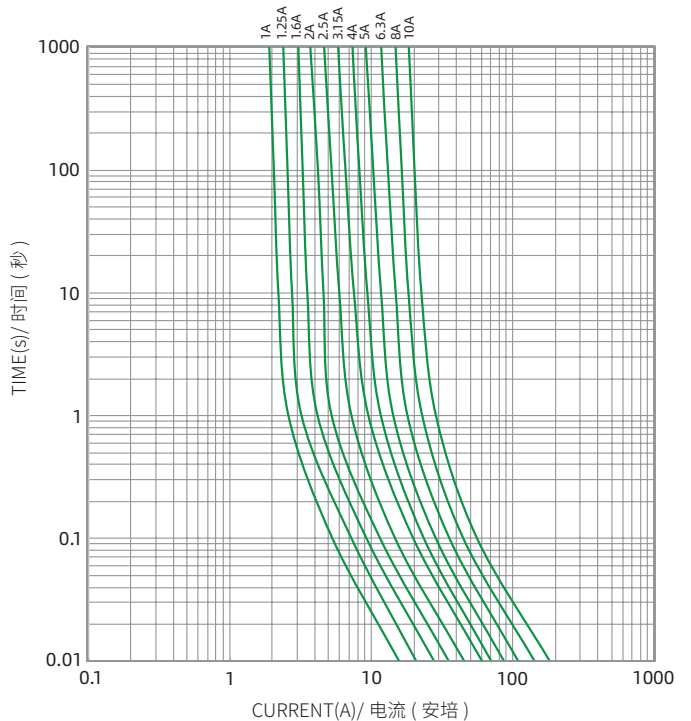

Standards/ 标准: IEC 60127

Operating Temperature/ 工作温度: -55°C ~125°C

Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max

Solderability/ 可焊性: 245°C ±5°C, 5s ±0.5s