



NH2XLaR 1500V DC 125-420A

Class of Operation: aR

保护特性: aR



Standard/ 标准: UL 248-13, IEC 60269-4, GB/T 13539.4

INTERRUPTING CAPACITY/ 分断能力:
250,000 A at 1500V DC (Time Constant: ≤ 4ms)


TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证	
		cURus	CE
2XLaR125U15		●	●
2XLaR125U15B	125A	●	●
2XLaR125U15C		●	●
2XLaR160U15		●	●
2XLaR160U15B	160A	●	●
2XLaR160U15C		●	●
2XLaR200U15		●	●
2XLaR200U15B	200A	●	●
2XLaR200U15C		●	●
2XLaR250U15		●	●
2XLaR250U15B	250A	●	●
2XLaR250U15C		●	●
2XLaR300U15		●	●
2XLaR300U15B	300A	●	●
2XLaR300U15C		●	●
2XLaR315U15		●	●
2XLaR315U15B	315A	●	●
2XLaR315U15C		●	●
2XLaR350U15		●	●
2XLaR350U15B	350A	●	●
2XLaR350U15C		●	●
2XLaR400U15		●	●
2XLaR400U15B	400A	●	●
2XLaR400U15C		●	●
2XLaR420U15		●	●
2XLaR420U15B	420A	●	●
2XLaR420U15C		●	●

U15 DENOTES FOR 1500V DC U15 表示 1500V DC
 ● DENOTES FOR APPROVAL ● 表示已取得安全认证
 ○ DENOTES FOR PENDING ○ 表示正在申请安全认证

NH2XLaR 1500V 平均 I-T 曲线图 (仅供参考)

NH2XLaR 1500V AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)


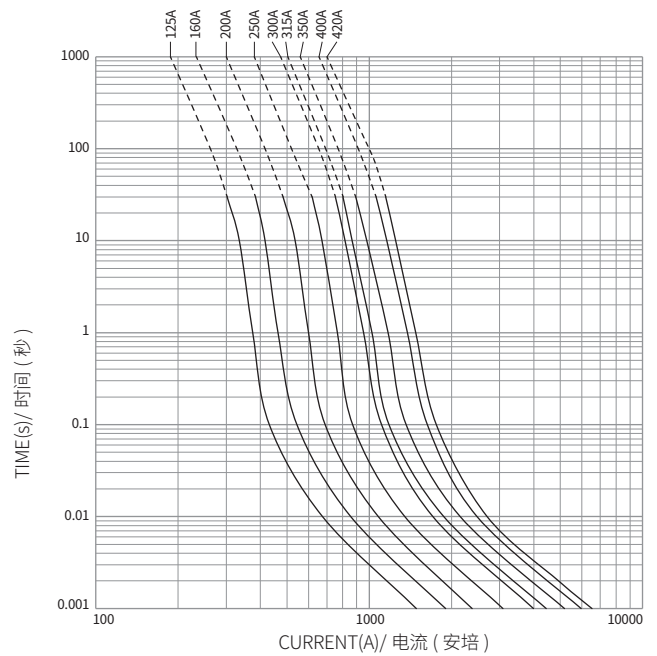


Dimensions/ 尺寸:

Unit unit: mm



Type:NH2XLaR

Part No.: NH2XLaR(amp rating)U15

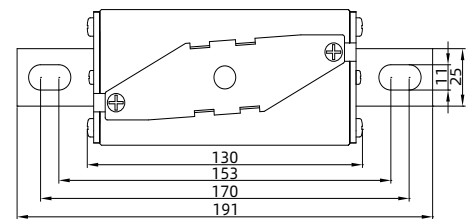

Type:NH2XLaR

Part No.: NH2XLaR(amp rating)U15B

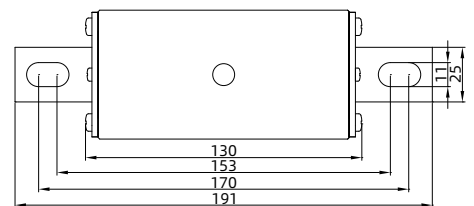

Dimensions/ 尺寸:

Unit unit: mm

Type:NH2XLaR

Part No.: NH2XLaR(amp rating)U15C

