



H000TD/H000TD-T 690V AC 25A-315A

Class of Operation: aR

保护特性: aR



Standard/ 标准: GB/T 13539.4

INTERRUPTING CAPACITY/ 分断能力:


100,000 A at 690V AC

Dimensions/ 尺寸:

Unit 单位: mm



Type: H000TD 螺栓连接带弹片指示器型 / 不带弹片指示器型

Part No.: H000TD(amp rating) / H000TD(amp rating)B




Type: H000TD-T 螺栓连接带弹片指示器型 / 不带弹片指示器型

Part No.: H000TDT(amp rating) / H000TDT(amp rating)B

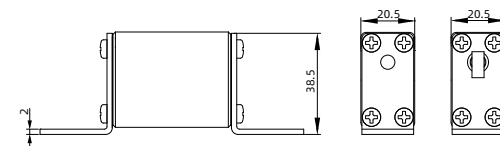

H000TD/H000TD-T 690V 平均 I-T 曲线图 (仅供参考)

H000TD/H000TD-T 690V AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE)

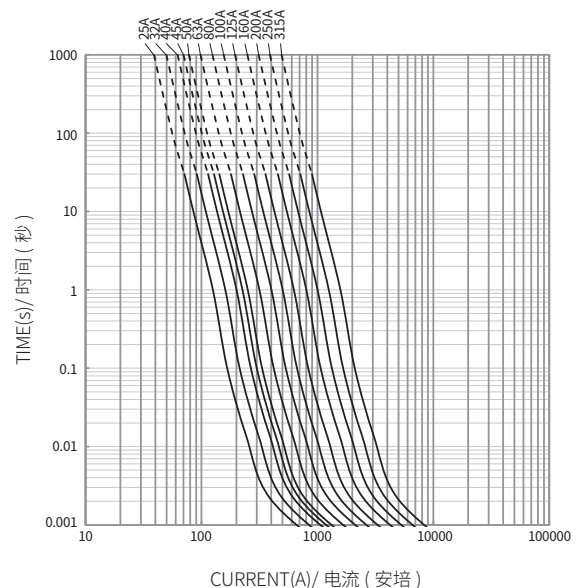

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号		CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证
带弹片指示器 With shrapnel indicator	不带弹片指示器 Without shrapnel indicator		CCC
H000TD25	H000TD25B	25A	●
H000TDT25	H000TDT25B		●
H000TD32	H000TD32B	32A	●
H000TDT32	H000TDT32B		●
H000TD40	H000TD40B	40A	●
H000TDT40	H000TDT40B		●
H000TD45	H000TD45B	45A	●
H000TDT45	H000TDT45B		●
H000TD50	H000TD50B	50A	●
H000TDT50	H000TDT50B		●
H000TD63	H000TD63B	63A	●
H000TDT63	H000TDT63B		●
H000TD80	H000TD80B	80A	●
H000TDT80	H000TDT80B		●
H000TD100	H000TD100B	100A	●
H000TDT100	H000TDT100B		●
H000TD125	H000TD125B	125A	●
H000TDT125	H000TDT125B		●
H000TD160	H000TD160B	160A	●
H000TDT160	H000TDT160B		●
H000TD200	H000TD200B	200A	●
H000TDT200	H000TDT200B		●
H000TD250	H000TD250B	250A	●
H000TDT250	H000TDT250B		●
H000TD315	H000TD315B	315A	●
H000TDT315	H000TDT315B		●

● DENOTES FOR APPROVAL

● 表示已取得安全认证

○ DENOTES FOR PENDING

○ 表示正在申请安全认证